

Eur päls h s Patentamt  
Eur pean Pat nt Offic  
Office eur p 'en des brev ts



(11) **EP 0 773 636 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**02.10.2002 Bulletin 2002/40**

(51) Int Cl.7: **H04B 7/005, H04L 12/28**

(21) Application number: **96308027.0**

(22) Date of filing: **05.11.1996**

(54) **Resource allocation system for wireless networks**

Vorrichtung zur Ressourcenzuteilung in drahtlosen Netzwerken

Système d'allocation de ressources pour réseaux sans fils

(84) Designated Contracting States:  
**DE FR GB NL**

(30) Priority: **13.11.1995 US 6636**

(43) Date of publication of application:  
**14.05.1997 Bulletin 1997/20**

(73) Proprietor: **LUCENT TECHNOLOGIES INC.**  
**Murray Hill, New Jersey 07974-0636 (US)**

(72) Inventor: **Whitehead, James F.**  
**Bellevue, Washington 98004 (US)**

(74) Representative:  
**Buckley, Christopher Simon Thirsk et al**  
**Lucent Technologies (UK) Ltd,**  
**5 Mornington Road**  
**Woodford Green, Essex IG8 0TU (GB)**

(56) References cited:  
**EP-A- 0 565 507** **EP-A- 0 579 372**  
**WO-A-93/07702** **US-A- 5 003 619**

**EP 0 773 636 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] Overlapping transmissions of information addressed to the same device by two or more other devices that share a common communications path is a well-known communications system issue. In wired and single-cell wireless networks, it is generally desirable to avoid overlapping transmissions because collisions or interferences that result therefrom degrade the performance of these networks. Among the numerous solutions proposed to address this issue for Local Area Networks (LAN), perhaps the best known and the most commercially successful solution is the Carrier Sense Multiple Access (CSMA) medium access control (MAC) protocol that is used primarily for Ethernet-based wired Local Area Networks (LAN). The CSMA protocol requires a station that shares a common facility with one or more other station, to attempt detection of a carrier before initiating transmission. The carrier detection process operates to temporarily inhibit transmission by a sending station while another station is sensed to be transmitting. Implementation of the CSMA protocol for a wired LAN typically requires the shared common facility to be of a given length in order to avoid the possibility that a station may not be able to detect a carrier originated from a too-far transmitting station that is sometimes referred to as a "hidden station" or a "hidden terminal".

[0002] While various kinds of measures have been devised to avoid collisions in wired and single-cell wireless networks, by contrast, in multi-cell and/or peer-to-peer wireless networks, simultaneous or overlapping transmissions that result in frequency reuse (instead of collision) are highly desirable when adequately controlled. Methods to control or manage frequency reuse include Fixed Channel Assignment (FCA) and Dynamic Channel Assignment (DCA). Despite the enormous commercial acceptance of the FCA and DCA methods for circuit-switched networks, network designers have been reluctant to use them in packet-switched networks in general and Wireless Local Area Networks (WLAN), in particular. The reluctance of system designers to use FCA and DCA techniques for wireless packet switched networks stems primarily from their concern of wasting valuable bandwidth, and their eagerness to take advantage of existing software programs and hardware designs for the CSMA protocol. Hence, in lieu of the FCA and DCA methods, proposals have been submitted to adapt the CSMA protocol to manage frequency reuse. According to those proposals, carrier sensing in a WLAN environment can be achieved by causing nearby stations to defer to a transmission in progress while distant stations are allowed to communicate between themselves without causing interference with the communications of the nearby stations. Hence, as suggested by those proposals, carrier sensing in a WLAN environment requires definition of threshold parameters that are used to classify a station as close to, or distant from, a transmission in progress. The use of the CSMA medium access control protocol in a WLAN environment has presented, and still presents a number of challenges. For example, in a WLAN environment, the shared common facility is an allocated radio frequency (RF) spectrum whose capacity is limited, but whose length is not. The inability to limit the length of the shared facility exacerbates the hidden terminal problem. In addition signal fading in a WLAN environment causes carrier sensing to "miss" a nearby terminal while raising a "false alarm" for a far-away non interfering station.

[0003] In response to these problems, techniques, such as Busy-Tone Multiple Access and Idle-Signal Multiple Access, have been proposed to minimize the impact of the hidden terminals problem in a WLAN that implements the CSMA protocol. Another technique disclosed in International Patent Application No. PCT/US94/07004, involves exchange of a short Request-to-Send (RTS) control packet that is sent by a transmitting station, and a short Clear-to-Send (CTS) control packet, that is forwarded by the intended receiving station only when the receiving station detects no competing transmission. Unfortunately, the RTS and CTS packets may be much longer than the carrier-sense detection time, thereby introducing undue latency in the network. More importantly, the transmission of the CTS packet operates to inhibit all stations that can listen to that transmission, including some stations that are so far removed that they cause no danger of interference with the subsequent packet transmission initiated by the intended receiver of the CTS packet.

[0004] Realizing that carrier sensing methods are impractical for some wireless environments, such as outdoor systems, some network designers have decided to apply the dynamic resource allocation method (heretofore used for circuit-switched networks) to packet-switched networks in general, and base-station controlled WLANs, in particular. One of these methods that is disclosed in US Pat. No. 5,239,673, uses a priori interference information and relies on centrally-controlled algorithm and wired communications among base stations. Unfortunately, the requirements of central control, interconnection between base stations preclude the application of this method in peer-to-peer WLAN environments. Hence, it is a continuing problem to efficiently allocate resources in a wireless network that is suitable for use in indoor as well as in outdoor environments.

[0005] According to one aspect of this invention there is provided a method as claimed in claim 1.

[0006] According to another aspect of this invention there is provided a system as claimed in claim 13.

[0007] The present invention is directed to a system that manages frequency reuse and avoids collision in a wireless network through the exchange (between a sending station and an intended receiving station) of handshake information that includes data indicative of power levels at which the sending and receiving stations are allowed to function. The exchange of power levels data between pairs of receiving and sending stations accomplishes several objectives. It avoids collision by preventing many packets that would not reach their intended destination (because of interferences)

from being transmitted. Because the exchange of power levels data between a pair of receiving and sending stations is broadcast over the wireless network for reception by all stations, that exchange provides information that is used by all other stations on the wireless network to avoid interfering with the communications between the pair in question without unnecessary deferrals.

[0008] In an embodiment of the principles of the invention, all stations on a wireless network are arranged to maintain a power constraint list which encodes each station's knowledge about other stations' vulnerable on-going packets. The power constraint list may be derived, for example, from path-gain measurement that is based on received-signal-strength indication (RSSI) and the advertised transmit power level in each transmitted packet.

[0009] When a sending station on a WLAN wants to transmit one or more data packets to a receiving station on the same WLAN, a REQUEST/PERMIT handshaking exchange takes place between the two stations. In that exchange, the sending and receiving stations advertise not only packet identification and packet length information, as in standard RTS/CTS, but also power levels and other interference-related information. Most important, the receiver advertises the maximum allowed interference for the expected packet. Specifically, the intended receiver of a packet determines whether the packet will be transmitted, and if so, the particular power level at which the sending station is authorized to transmit the packet(s). The receiving station knows a particular signal interference ratio that is required for successful reception of the packet based on current interference measurement that is performed by all stations, and that is predicated on information, such as received-signal-strength indication (RSSI), path-gain measurement, and the power constraint list.

[0010] The sending station is allowed to transmit a data packet only when the intended receiving station determines that the data packet can be sent at an adequate power level, and can still avoid interfering with any other packets being communicated between other pairs of sending and receiving stations.

[0011] Advantageously, implementation of the principles of the invention allows a receiving station to manage interference precisely based on information about the sender-receiver path and interference paths, thereby permitting frequency reuse to take place only where it is harmless. Moreover, a protocol implementing the principles of the invention is completely distributed and compatible with both peer-to-peer and base-station-oriented networks. In addition, a protocol implementing the principles of the invention allows the hidden terminal problem to be solved for indoor wireless networks. For outdoor wireless networks, the same single channel can be used at every base station to provide service economically when demand does not justify more than the single, shared channel. Furthermore, a protocol implementing the principles of the invention is self-organized, thereby avoiding the need for parameter setting and corresponding opportunity for error.

#### **Brief Description of the Drawings**

[0012] In the drawings:

FIG. 1 shows an illustrative representation of a peer-to-peer wireless network that is arranged to implement the principles of the invention;

FIG. 2 is a multi-cell, base-station oriented wireless network;

FIG. 3 depicts different sub-fields that may be included in REQUEST and PERMIT signaling messages;

FIG. 4 is a table that shows the different instructions executed by the different elements in FIG. 1 or FIG. 2 to implement the principles of the invention; and

FIG. 5 is a block diagram of an interface module which allows a station to transmit and receive information from another station in a collision-free manner,

#### **Detailed Description**

[0013] FIG. 1 is an illustrative representation of a peer-to-peer wireless network that is arranged to implement the principles of the invention. The network of FIG. 1 shows ten stations depicted as circles that are arranged to communicate with each other over a single (frequency) wireless channel. For example, active communications may take place simultaneously between the pairs of stations 10 and 20, 30 and 40 and 50 and 60. Stations 70-100 actively listen to the communications between the pairs of stations while they are in an idle state. Specifically, stations 70-100 use the idle time to collect information for use when they need to transmit their own data packets (as explained below). Types of information exchanged between pairs of stations 10 and 20, 30 and 40 and 50 and 60 include data packets and signaling packets. Data packets transmitted between pairs of stations may be of any length and typically carry payload

information or user data. By contrast, the signaling packets are short packets that are used for handshaking operations between each pair of stations. The signaling packets are transmitted in-band, i.e., using the shared (frequency) wireless channel. Signaling packets may include, for example, physical layer overhead data, and acknowledgment (ACK) data communicated between stations. Of particular significance among signaling packet information exchanged between pairs of stations are the REQUEST and PERMIT fields that are short special messages of fixed size that are generated and transmitted only in specific situations.

[0014] Shown in the table of FIG. 3 are different sub-fields that may be included in the REQUEST and PERMIT fields. Because the REQUEST and PERMIT fields constitute almost irreducible overhead, they must be as short as possible. For example, if the addressing space for the wireless network of FIG. 1 is carefully managed, the addresses that are represented in FIG. 3 by the Send\_id and the Receive\_id sub-fields, may be limited to about 10 bits. Power levels shown in FIG. 3 as Current\_Power and Net\_Maximum\_Power (described in detail below in conjunction with FIG. 4) may be represented with sufficient accuracy with 6 bits (allowing 128 dB of range with 2 dB resolution). Similarly, the length of a packet can be represented with 6 bits. With these values, the REQUEST and PERMIT fields may be as short as 38 and 44 bits, respectively. It would be appreciated that other sub-fields might be included in the REQUEST and PERMIT fields. For example, in multimedia applications which mix delay-tolerant and delay-intolerant packets, other sub-fields may be included in the request field to invoke input-priority mechanisms for providing time-bounded services within the distributed-control peer-to-peer wireless network of FIG. 1.

[0015] FIG. 2 illustrates a multi-cell, base-station-oriented wireless network that is arranged to allow collision-free communications between stations of different cells. Shown in FIG. 2 are cells 201 to 206 that illustrate radio coverage areas served by respective base stations represented in FIG. 2 by small squares at the center of each cell. The base stations serve mobile end-user devices represented in FIG. 2 by circles. Hence, communications between mobile end-user devices associated with different cells may take place through their respective base stations. All the base stations are served by a single shared (frequency channel) that is assigned to mobile end-user devices according to either Time-Division Duplex (TDD) techniques or Frequency-Division Half-duplex (FDH) techniques.

[0016] In prior art systems, the use of Frequency-Division Duplex (FDD) operation has some advantages (and disadvantages) compared to TDD. For example, FDD avoids base-to-base interference, which can be particularly severe for TDD systems outdoors. FDD is also preferred when low-power, small, inexpensive receivers are used in a wireless network. Receivers with those attributes sometimes limit practical bandwidth available to end-users. For a given maximum bit rate, TDD divides that bit rate between the up-link and down-link, whereas FDD would allow simultaneous use of the maximum bit rate in both directions. Disadvantages of FDD include more complex RF design and fixed partitioning of uplink and downlink bandwidth.

[0017] A protocol implementing the principles of the invention may appear to rely on TDD structure because of the "Ping-Pong" nature of the REQUEST-PERMIT-DATA sequence, and because the interference calculations (described below) assume that path losses are reciprocal (the same for both directions of a link). FDD systems generally do not have reciprocal path losses because the two directions of a terminal-base station link operate in different frequencies. So, at any instant the fading values in the two directions will not be perfectly correlated.

[0018] In one example implementing the Frequency-Division-Half-Duplex (FHD) technique with the principles of the invention, terminal-to-base and base-to-terminal transmissions are in separate frequencies, but not simultaneous within the same cell. This retains the time-structure of the TDD technique, but avoids the base-to-base interference problem of TDD. FHD operation also appears to waste half the bandwidth, and this is true for a single-cell system. But for multiple cells, the actual waste is less, since interference comes from only same-direction transmissions and will have less impact (allow closer reuse).

[0019] In another example of the invention, path-gain instrumentation is used to address the non-reciprocal-path issue. Specifically, when path losses are static, a network can measure path-losses via network-management functions defined for that purpose. For example, receive-level measurements could be made for all packets (not just REQUEST and PERMIT packets) and communicated via network management packets. These proposed enhancements would overcome some of the problems associated with the use FDD and TDD techniques in wireless networks.

[0020] Each station in the wireless network of FIGs. 1 and 2 is arranged to perform a number of functions which include the following.

[0021] FIG. 4 is a table that shows the different instructions executed by the different elements in FIG. 1 or FIG. 2 to implement the principles of the invention.

1) Whether active-busy or active-idle, each station maintains a power-constraint list which contains each station's knowledge about vulnerable other stations' on-going packets.

2) Each station is arranged to exchange REQUEST/PERMIT signaling packets with another station such that the sending and receiving stations advertise not only identification and packet length, as in standard RTS/CTS, but power levels and other interference-related information. Most important, when a station is a receiving station, it

advertises the maximum allowed interference for the expected packet.

3) When a station is an intended receiving station of a packet, it determines whether the packet will be transmitted, and at what power level. The receiving station knows what Signal-to-Interference Ratio (SIR) is required for successful reception of the packet.

4) Each station is arranged to perform path-gain measurement at the end of each (decoded) transmission. The path gain measurement is based on received-signal-strength indication (RSSI) and the advertised transmit power level in the transmitted packet. Each station uses those measurements to predict interference conditions. Current interference measurement at all times is based on RSSI.

[0022] FIG. 4 illustrates a table that shows the different instructions executed by the different elements in FIG. 1 or FIG. 2 to implement the principles of the invention. The table of FIG. 4 specifies in detail the operations of a protocol implementing the principles of the invention. Please note that power control is not specified, except that transmission power levels must fall within the constraints of the power constraint list and minimum required power calculations. For illustrative purposes, it is assumed that a simple exemplary contention resolution algorithm, such as ALOHA is implemented with retry delays that double after every failure. It is to be understood however, that use of power control and other sophisticated contention resolution methods is not precluded.

[0023] The leftmost column of FIG. 4 shows the operations of a sending station also called a "sender". In this example, stations 10 and 20 are considered sending and receiving stations, respectively. When station 10 wishes to send a packet to station 20, station 10 generates and transmits a REQUEST signaling packet to station 20. As mentioned earlier, the REQUEST message may include the following sub-fields SEND\_ID, RECEIVE\_ID, LENGTH, CURRENT\_POWER. The SEND\_ID and RECEIVE\_ID sub-fields represent the addresses of sending and receiving stations 10 and 20, respectively, while the length sub-field indicates the length (and possibly other attributes) of the packet to be transmitted. The CURRENT\_POWER sub-field represents the power at which the REQUEST signaling message is being transmitted, while the NET\_MAXIMUM\_POWER sub-field is indicative of the threshold power level at which sending station 10 is able to transmit. The REQUEST message itself is sent at or below the net\_maximum\_power value. If this is less than the minimum possible transmit power of sending station 10, then station 10 must defer. After transmitting the REQUEST signaling message, sending station 10 initiates a timer and awaits a PERMIT response from station 20. If the timer expires before the PERMIT response is received, then station 10 re-transmits the REQUEST signaling message.

[0024] The middle column of FIG. 4 describes the functions performed by receiving station 20 also called "receiver" 20. Upon receiving the REQUEST signaling message from station 10, receiving station 20 first determines the current\_interference\_level, using, for example, some combination of RSSI levels received just before and/or just after the REQUEST. Receiving station 20 then calculates the sender\_path\_gain from the RSSI during the REQUEST and the transmit power advertised in the REQUEST. Thereafter, receiving station 20 determines the required signal level so that the SIR required for this packet is met, and calculates the required transmit power for sending station 10.

[0025] If the required sender transmit power is no more than the net\_maximum\_power value advertised in the REQUEST signaling message, then packet transmission is allowed. Accordingly, receiving station 20 composes a PERMIT signaling packet which includes, as shown in FIG. 2 the following sub-fields: SEND\_ID, RECEIVE\_ID, LENGTH, CURRENT\_POWER, PRESCRIBED\_POWER, MAX\_INTERFERENCE. The PERMIT signaling message includes sending and receiving stations 10 and 20 respective addresses and the packet length. Also included in the PERMIT signaling message is the prescribed\_power level which must fall between the required and maximum values. The maximum\_allowed\_interference level at receiving station 20 is based on the prescribed transmit power, sender path gain, and SIR requirement. The PERMIT itself must be transmitted at no more than receiving station 20 own net\_maximum\_power value, and includes the transmit power level. Examples of illustrative calculations performed by receiving station 20 are shown in the box below:

$$\begin{aligned}
 \text{sender\_path\_gain} &= \frac{\text{request\_level}}{\text{REQUEST:current\_power}} \\
 \text{required\_signal\_level} &= \text{required\_sir} * \text{current\_interference\_level} \\
 \text{required\_power} &= \frac{\text{required\_signal\_level}}{\text{sender\_path\_gain}} \\
 &= \frac{\text{required\_sir} * \text{current\_interference\_level} * \text{REQUEST:current\_power}}{\text{request\_level}} \\
 \text{PERMIT} &\Leftrightarrow \text{required\_power} \leq \text{REQUEST:net\_maximum\_power} \\
 \text{required\_power} &\leq \text{PERMIT:prescribed\_power} \leq \text{REQUEST:net\_maximum\_power} \\
 \text{max\_allowed\_interference} &= \frac{\text{sender\_path\_gain} * \text{prescribed\_power}}{\text{required\_sir}}
 \end{aligned}$$

[0026] The following example illustrates the calculations performed by receiving station 20 to process a REQUEST from sending station 10. For illustrative purposes, some values were assigned for the request\_level, the current\_power and the net\_maximum power in the REQUEST signaling message, while a signal-to-interference ratio value of 10 db was selected for the required\_sir. Those values are shown in the box below under the ASSUMPTIONS header.

**ASSUMPTIONS:**

$$\begin{aligned}
 \text{request\_level} &= -70 \text{ dBm} = 10^{-10} \text{ watt} \\
 \text{REQUEST:current\_power} &= 10 \text{ dBm} = 10^{-2} \text{ watt} \\
 \text{REQUEST:net\_maximum\_power} &= 1 \text{ dBm} = 10^{-3} \text{ watt} \\
 \text{required\_sir} &= 10 \text{ dB} = 10 \\
 \text{current\_interference\_level} &= -100 \text{ dBm} = 10^{-13} \text{ watt}
 \end{aligned}$$

**THEN**

$$\begin{aligned}
 \text{sender\_path\_gain} &= \frac{10^{-10} \text{ watt}}{10^{-2} \text{ watt}} = 10^{-8} \text{ watt} \\
 \text{required\_signal\_level} &= 10 * 10^{-13} \text{ watt} = 10^{-12} \text{ watt} \\
 \text{required\_power} &= \frac{10^{-12} \text{ watt}}{10^{-8}} = 10^{-4} \text{ watt} \\
 \text{PERMIT} &\Leftrightarrow 10^{-4} \text{ watt} \leq 10^{-3} \text{ watt, so the PERMIT will be sent.} \\
 10^{-4} \text{ watt} &\leq \text{PERMIT:prescribed\_power} \leq 10^{-3} \text{ watt}
 \end{aligned}$$

**SUPPOSE we pick**

$$\text{PERMIT:prescribed\_power} = 10^{-3} \text{ watt}$$

**THEN**

$$\text{max\_allowed\_interference} = \frac{10^{-8} * 10^{-3} \text{ watt}}{10} = 10^{-11} \text{ watt} = -90 \text{ dBm}$$

[0027] The rightmost column of FIG. 4 shows the operations of a 3rd party station (station 70, for example) that decodes the PERMIT signaling message. Third party station 70 measures a receiver\_path\_gain based on an RSSI during the PERMIT and the current transmit level. Thereafter, third party station 70 calculates a max\_power based on the receiver\_path\_gain and maximum\_allowed\_interference level. Subsequently, third party station 70 calculates an expiry\_time based on the advertised packet length and the time required for an acknowledgment.


[0028] For this calculation, it is assumed for the sake of clarity that the 3rd-party-to-Sender path gain is the same as the Sender-to-3rd party path gain. It is also assumed the presence of a static channel, that is, that the path gain at the time of the calculation is the same as it would be at a putative future transmission time. The assumptions may be

removed by including an additional margin in the calculation of max\_power. Exemplary calculations performed by a third party station are shown in the box below.

$$\begin{aligned} \text{receiver\_path\_gain} &= \frac{\text{permit\_level}}{\text{PERMIT:current\_power}} \\ \text{max\_power} &= \frac{\text{PERMIT:maximum\_allowed\_interference}}{\text{receiver\_path\_gain}} \\ &= \frac{\text{PERMIT:maximum\_allowed\_interference} \times \text{PERMIT:current\_power}}{\text{permit\_level}} \end{aligned}$$

[0029] In one implementation of the principles of the invention, the 3rd party station 70 may add the entry (max\_power, expiry\_time) to its power constraint list, and if necessary, update the net\_maximum\_power value. An option that may be more efficient is to add only non-dominated entries to the list and to delete newly-dominated entries.

[0030] In the graph shown below, the new entry (depicted by the dashed lines) dominates another entry (depicted by the dotted lines) since it is more restrictive and expires later. The dominated entry is deleted. The new entry is not itself dominated by any remaining entry. The new entry has no effect on the net\_maximum\_power at the moment, since a more restrictive entry is still in force.

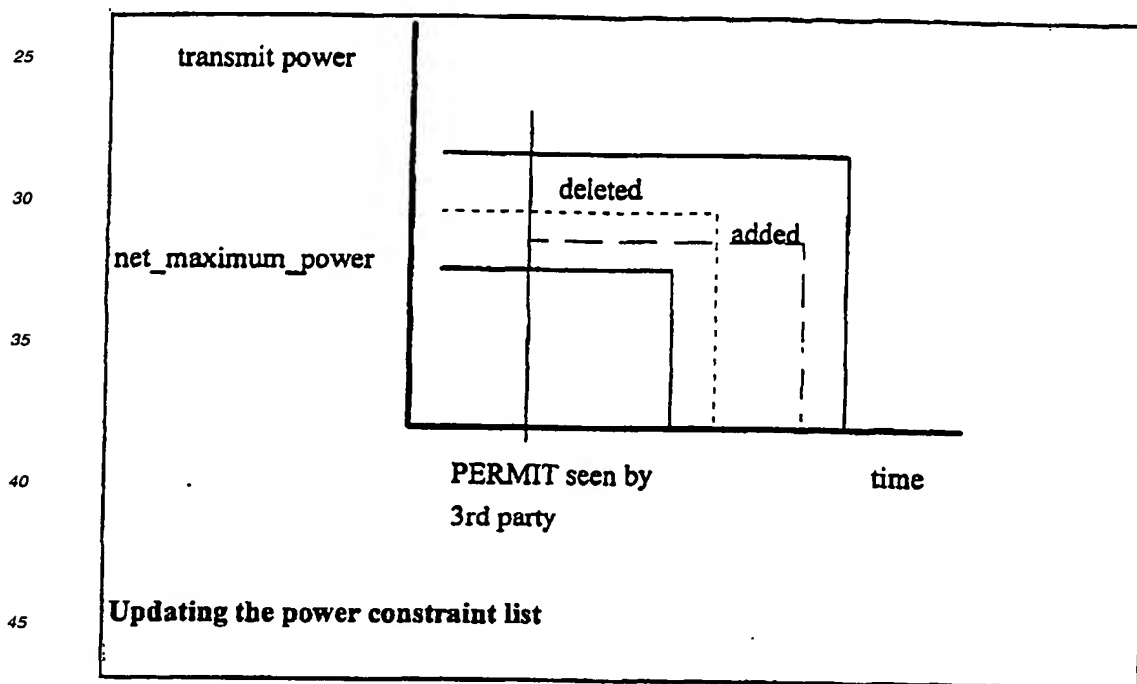

[0031] When sending station 10 receives a PERMIT signaling message in response to its previously transmitted REQUEST signaling message, sending station 10 then transmits its data packet at the power level prescribed in the PERMIT message. If the PERMIT signaling message is not received before a time-out occurs, then sending station 10 must defer. After transmitting a DATA packet sending station 10 sets a timer and waits for an ACK message from receiving station 20. If a Time-out occurs before the ACK is received, sending station 10 must defer. If the ACK is received, the packet has been successfully sent.

[0032] After receiving station 20 has issued a PERMIT message (in response to a REQUEST) and received a correct data packet, receiving station 20 then transmits an ACK message to confirm correct reception. The ACK message should be transmitted at no greater than receiving station 20's current net\_maximum\_power value.

[0033] When sending station 10 defers due to a time-out, the Sending station may take a random delay and then

start the transmission process from the beginning. After each deferral, the average of the random delay may be doubled. After a successful packet the average of the random delay is reset to the nominal value.

[0034] In summary, the REQUEST-PERMIT exchange of the protocol accomplishes several objectives: a) it avoids collision by preventing many packets that would not reach their intended destination (because of interferences) from being transmitted, and b) it advertises the information that other stations can use to avoid interfering with a data packet being transmitted without unnecessary deferrals.

[0035] FIG. 5 is a block diagram of an interface module which allows a station to transmit and receive information from another station in a collision-free manner. Shown in FIG. 5 are components of the interface module which include a CPU 501, a memory 502, a host 503, a radio control unit 504, a radio data unit 505 and a radio transmitter and receiver 506. CPU 501 is a general processor that includes an Arithmetic logic unit that is arranged to execute the instructions that are shown in FIG. 4 and stored in memory 502. Execution of these instructions by CPU 501 allows the power calculations described above to be performed in order to implement the principles of the invention. Information transmitted by the interface module originates from host 503 and reaches the module via the CPU address bus. Host 503 may also be a base station such as one of the base stations shown in FIG. 2. Radio control 504 is designed to assess received-signal-strength indication, and notify CPU 501, as appropriate. Radio data unit 504 modulates signals received from CPU 501 to make them suitable for transmission over the radio transmitter 506. Conversely, radio signals received from radio receiver 506 are modulated into suitable format by radio data unit 504 for transmission to CPU 501 or host 503.

[0036] The foregoing is to be construed as only being an illustrative embodiment of the principles of this invention. Persons skilled in the art can easily conceive of alternative arrangements providing functionality similar to this embodiment without any deviation from the scope of this invention.

## Claims

1. A method of communicating information via a wireless network, **characterized by:**

broadcasting over a wireless communications channel a first signaling message (REQUEST) from a first end-user communications device (10) which is coupled to a wireless network, said signaling message (REQUEST) including a request to transmit at least one data packet to a second communications end-user device (20) which is also coupled to said wireless network, said request including data indicative of an upper power level (NET\_MAXIMUM\_POWER) at which said first end-user communications device (10) is able to transmit said at least one data packet;

in response to said second end-user communications device (20) receiving said first signaling message (REQUEST), determining permission parameters for said at least one data packet to be transmitted by said first end-user communications device (10), said permission parameters including a prescribed power level (PRESCRIBED\_POWER) for transmission of said at least one data packet;

broadcasting from said second end-user communications device (20) a second signaling message (PERMIT) via said communications channel, said second signaling message (PERMIT) including said permission parameters; and

in response to said first end-user communications device (10) receiving said second signaling message (PERMIT), transmitting from said first end-user communications device (10) said at least one data packet based on said prescribed power level (PRESCRIBED\_POWER).

2. A method as claimed in claim 1 wherein said permission parameters include an upper interference signal level (MAX\_INTERFERENCE) above which at least one other end-user communications device which is connected to said wireless network is forbidden during said transmission of said at least one data packet to broadcast information via said wireless communications channel.

3. A method as claimed in claim 1 including:

starting a timer at said first end-user communications device (10) after broadcasting said first signaling message (REQUEST); and

broadcasting a subsequent request (REQUEST) to transmit said at least one data packet when said timer expires before said second signaling message (PERMIT) is received at said first end-user communications device (10).

4. A method as claimed in claim 1 including:



transmitting from said second end-user communications device (20) an acknowledgment message (ACK) when said at least one data packet is received at said second end-user communications device (20), said acknowledgment message (ACK) being destined for said first end-user communications device (10).

5 5. A method as claimed in claim 1 including:

starting a timer at said first end-user communications device (10) after said first end-user communications device (10) has transmitted said at least one data packet; and  
 10 re-transmitting said at least one data packet when said timer expires before an acknowledgment message (ACK) that is indicative of reception of said at least one data packet at said second end-user communications device (20), is received from said second end-user communications device (20).

6. A method as claimed in claim 1 wherein said first signaling message (REQUEST) includes in addition to said upper power level (NET\_MAXIMUM\_POWER), data indicative of a) addresses (SEND\_ID, RECEIVE\_ID) of said first  
 15 (10) and second (20) end-user communications devices, b) a length (LENGTH) of said at least one data packet to be transmitted, and c) the present power level (CURRENT\_POWER) at which said first signaling message (REQUEST) is being broadcasted.

7. A method as claimed in claim 1 wherein said second signaling message (PERMIT) includes in addition to said permission parameters data indicative of a) addresses (SEND\_ID, RECEIVE\_ID) of said first (10) and second  
 20 end-user (20) communications devices, b) a length (LENGTH) of said at least one data packet to be received, and c) the present power level (CURRENT\_POWER) at which said second signaling message (PERMIT) is being broadcasted.

25 8. A method as claimed in claim 2 including:

monitoring at said at least one other end-user communications device (70) said first (REQUEST) and second (PERMIT) signaling messages and said at least one data packet exchanged between said first (10) and second  
 30 (20) end-user communications devices; and  
 building at said at least one other end-user communications device (70) a power constraint list for use by said at least one other end-user communications device in future transmission of data in a collision-free manner.

9. A method as claimed in claim 8 wherein said power constraint list includes data indicative of a particular time at which said transmission of said at least one data packet is scheduled to end.  
 35

10. A method as claimed in claim 9 wherein said particular time is calculated based on factors which include a) the length of said at least one data packet to be transmitted, and an amount of time needed for transmission of an acknowledgement signaling message (ACK) from said second end-user communications device (20) to said first  
 40 end-user communications device (10).

11. A method as claimed in claim 9 wherein said power constraint list includes data indicative of an uppermost power level which is derived from data transmission and signaling messages exchanges currently taking place.

45 12. A method as claimed in claim 11 including:

calculating said uppermost power level based on factors which include a) said upper interference signal level (MAX\_INTERFERENCE) in said second signaling message (PERMIT), and b) measurement of path gain between said first end-user communications device (10) and said at least one other end-user communications  
 50 device (70).

13. A system for communicating information over a wireless network, said system including:

a first end-user communications device (10) for broadcasting over a wireless network a request (REQUEST) to transmit at least one data packet to a second end-user communications device (20), said request (RE-  
 55 QUEST) including data indicative of an upper power level (NET\_MAXIMUM\_POWER) at which said first mobile end-user communications device (10) is able to transmit said at least one data packet;  
 a processor (501) of said second end-user communications device (20) adapted for receiving said request (REQUEST) and determining permission parameters for said at least one data packet to be transmitted by

said first mobile end-user communications device (10), said permission parameters including a prescribed power level (PRESCRIBED\_POWER) for transmission of said at least one data packet;  
 a first transmitter (506) included in said second end-user communications device (20) for forwarding a signaling message (PERMIT) to said first mobile end-user communications device (10), said signaling message (PERMIT) including said permission parameters; and  
 a second transmitter (506) included in said first end-user communications device (10), responsive to receiving said signaling message (PERMIT), for sending said at least one data packet to said second end-user communications device (20) based on said prescribed power level (PRESCRIBED\_POWER).

## Patentansprüche

1. Verfahren zur Informationsübermittlung über ein drahtloses Netzwerk, **gekennzeichnet durch** die folgenden Schritte:

Rundsenden, über einen drahtlosen Kommunikationskanal, einer ersten Zeichengabenachricht (REQUEST) aus einem ersten Endbenutzer-Kommunikationsgerät (10), das an ein drahtloses Netzwerk angekoppelt ist, wobei die Zeichengabenachricht (REQUEST) eine Aufforderung zum Senden mindestens eines Datenpakets zu einem zweiten Endbenutzer-Kommunikationsgerät (20) enthält, das ebenfalls an das drahtlose Netzwerk angekoppelt ist, wobei die Aufforderung Daten enthält, die einen oberen Leistungspegel (NET\_MAXIMUM\_POWER) angeben, mit dem das erste Endbenutzer-Kommunikationsgerät (10) das mindestens eine Datenpaket senden kann;

als Reaktion darauf, daß das zweite Endbenutzer-Kommunikationsgerät (20) die erste Zeichengabenachricht (REQUEST) empfängt, Bestimmen von Zulassungsparametern für das mindestens eine Datenpaket, das **durch** das erste Endbenutzer-Kommunikationsgerät (10) gesendet werden soll, wobei die Zulassungsparameter einen vorgeschriebenen Leistungspegel (PRESCRIBED\_POWER) für das Senden des mindestens einen Datenpakets enthalten;

Rundsenden, aus dem zweiten Endbenutzer-Kommunikationsgerät (20), einer zweiten Zeichengabenachricht (PERMIT) über den Kommunikationskanal, wobei die zweite Zeichengabenachricht (PERMIT) die Zulassungsparameter enthält; und  
 als Reaktion darauf, daß das erste Endbenutzer-Kommunikationsgerät (10) die zweite Zeichengabenachricht (PERMIT) empfängt, Senden des mindestens einen Datenpakets aus dem ersten Endbenutzer-Kommunikationsgerät (10) auf der Grundlage des vorgeschriebenen Leistungspegels (PRESCRIBED\_POWER).

2. Verfahren nach Anspruch 1, wobei die Zulassungsparameter einen oberen Störsignalpegel (MAX\_INTERFERENCE) enthalten, über dem mindestens einem anderen mit dem drahtlosen Netzwerk verbundenen Endbenutzer-Kommunikationsgerät während des Sendens des mindestens einen Datenpakets verboten ist, Informationen über den drahtlosen Kommunikationskanal rundzusenden.

3. Verfahren nach Anspruch 1, mit den folgenden Schritten:

Starten eines Timers in dem ersten Endbenutzer-Kommunikationsgerät (10) nach dem Rundsenden der ersten Zeichengabenachricht (REQUEST); und

Rundsenden einer nachfolgenden Aufforderung (REQUEST) zum Senden des mindestens einen Datenpakets, wenn der Timer abläuft, bevor die zweite Zeichengabenachricht (PERMIT) in dem ersten Endbenutzer-Kommunikationsgerät (10) empfangen wird.

4. Verfahren nach Anspruch 1, mit den folgenden Schritten:

Senden einer Bestätigungsnachricht (ACK) aus dem zweiten Endbenutzer-Kommunikationsgerät (20), wenn das mindestens eine Datenpaket in dem zweiten Endbenutzer-Kommunikationsgerät (20) empfangen wird, wobei die Bestätigungsnachricht (ACK) für das erste Endbenutzer-Kommunikationsgerät (10) bestimmt ist.

5. Verfahren nach Anspruch 1, mit den folgenden Schritten:

Starten eines Timers in dem ersten Endbenutzer-Kommunikationsgerät (10), nachdem das erste Endbenutzer-Kommunikationsgerät (10) das mindestens eine Datenpaket gesendet hat; und  
 Neusenden des mindestens einen Datenpakets, wenn der Timer abläuft, bevor eine Bestätigungsnachricht

(ACK), die den Empfang des mindestens einen Datenpakets in dem zweiten Endbenutzer-Kommunikationsgerät (20) anzeigt, aus dem zweiten Endbenutzer-Kommunikationsgerät (20) empfangen wird.

- 5 6. Verfahren nach Anspruch 1, wobei die erste Zeichengabenachricht (REQUEST) zusätzlich zu dem oberen Leistungspegel (NET\_MAXIMUM\_POWER) Daten enthält, die folgendes anzeigen: a) Adressen (SEND\_ID, RECEIVE\_ID) des ersten (10) und des zweiten (20) Endbenutzer-Kommunikationsgeräts, b) eine Länge (LENGTH) des zu sendenden mindestens einen Datenpakets und c) den derzeitigen Leistungspegel (CURRENT\_POWER), mit dem die erste Zeichengabenachricht (REQUEST) rundgesendet wird.
- 10 7. Verfahren nach Anspruch 1, wobei die zweite Zeichengabenachricht (PERMIT) zusätzlich zu den Zulassungsparametern Daten enthält, die folgendes anzeigen: a) Adressen (SEND\_ID, RECEIVE\_ID) des ersten (10) und des zweiten (20) Endbenutzer-Kommunikationsgeräts, b) eine Länge (LENGTH) des zu empfangenden mindestens einen Datenpakets und c) den derzeitigen Leistungspegel (CURRENT\_POWER), mit dem die zweite Zeichengabenachricht (PERMIT) rundgesendet wird.
- 15 8. Verfahren nach Anspruch 2, mit den folgenden Schritten:  
  
Überwachen, in dem mindestens einen anderen Endbenutzer-Kommunikationsgerät (70), der ersten Zeichengabenachricht (REQUEST) und der zweiten Zeichengabenachricht (PERMIT) und des zwischen dem ersten  
20 (10) und dem zweiten (20) Endbenutzer-Kommunikationsgerät ausgetauschten mindestens einen Datenpakets; und  
  
Aufbauen einer Leistungsbeschränkungsliste in dem mindestens einen anderen Endbenutzer-Kommunikationsgerät (70) zur Verwendung durch das mindestens eine andere Endbenutzer-Kommunikationsgerät (70) beim zukünftigen Senden von Daten auf kollisionsfreie Weise.  
25
9. Verfahren nach Anspruch 8, wobei die Leistungsbeschränkungsliste Daten enthält, die eine bestimmte Zeit angeben, zu der das Senden des mindestens einen Datenpakets planmäßig enden soll.
- 30 10. Verfahren nach Anspruch 9, wobei die bestimmte Zeit auf der Grundlage von Faktoren berechnet wird, die a) die Länge des zu sendenden mindestens einen Datenpakets und eine benötigte Zeitdauer für das Senden einer Bestätigungs-Zeichengabenachricht (ACK) von dem zweiten Endbenutzer-Kommunikationsgerät (20) zu dem ersten Endbenutzer-Kommunikationsgerät (10) umfassen.
- 35 11. Verfahren nach Anspruch 9, wobei die Leistungsbeschränkungsliste Daten enthält, die einen obersten Leistungspegel angeben, der aus gerade stattfindenden Datenübertragungs- und Zeichengabenachrichten-Austauschvorgängen abgeleitet wird.
- 40 12. Verfahren nach Anspruch 11, mit dem folgenden Schritt:  
  
Berechnen des obersten Leistungspegels auf der Grundlage von Faktoren, die folgendes umfassen: a) den oberen Störsignalpegel (MAX\_INTERFERENCE) in der zweiten Zeichengabenachricht (PERMIT) und b) Messung der Wegverstärkung zwischen dem ersten Endbenutzer-Kommunikationsgerät (10) und dem mindestens einen anderen Endbenutzer-Kommunikationsgerät (70).
- 45 13. System zur Informationsübermittlung über ein drahtloses Netzwerk, wobei das System folgendes enthält:  
  
ein erstes Endbenutzer-Kommunikationsgerät (10) zum Rundsenden, über ein drahtloses Netzwerk, einer Aufforderung (REQUEST) zum Senden mindestens eines Datenpakets zu einem zweiten Endbenutzer-Kommunikationsgerät (20), wobei die Aufforderung (REQUEST) Daten enthält, die einen oberen Leistungspegel  
50 (NET\_MAXIMUM\_POWER) angeben, mit dem das erste Endbenutzer-Kommunikationsgerät (10) das mindestens eine Datenpaket senden kann;  
  
einen Prozessor (501) des zweiten Endbenutzer-Kommunikationsgeräts (20), der für den Empfang der Aufforderung (REQUEST) und das Bestimmen von Zulassungsparametern für das mindestens eine Datenpaket, das durch das erste Endbenutzer-Kommunikationsgerät (10) gesendet werden soll, ausgelegt ist, wobei die  
55 Zulassungsparameter einen vorgeschriebenen Leistungspegel (PRESCRIBED\_POWER) für das Senden des mindestens einen Datenpakets enthalten;  
  
einen in dem zweiten Endbenutzer-Kommunikationsgerät (20) enthaltenen ersten Sender (506) zum Weiterleiten einer Zeichengabenachricht (PERMIT) zu dem ersten mobilen Endbenutzer-Kommunikationsgerät (10),

wobei die Zeichengabenachricht (PERMIT) die Zulassungsparameter enthält; und einen in dem ersten Endbenutzer-Kommunikationsgerät (10) enthaltenen zweiten Sender (506), der auf das Empfangen der Zeichengabenachricht (PERMIT) reagiert, zum Senden mindestens eines Datenpakets zu dem zweiten Endbenutzer-Kommunikationsgerät (20) auf der Grundlage des vorgeschriebenen Leistungspiegels (PRESCRIBED\_POWER).

## Revendications

1. Procédé de communication d'informations par l'intermédiaire d'un réseau sans fil, **caractérisé par** :
  - la diffusion sur un canal de communications sans fil d'un premier message de signalisation (DEMANDE) depuis un premier dispositif de communications d'utilisateur final (10) qui est couplé à un réseau sans fil, ledit message de signalisation (DEMANDE) comportant une demande de transmission d'au moins un paquet de données à un deuxième dispositif d'utilisateur final de communications (20) qui est aussi couplé audit réseau sans fil, ladite demande comportant des données indicatives d'un niveau de puissance supérieur (PUISSANCE MAXIMALE RESEAU) auquel ledit premier dispositif de communications d'utilisateur final (10) est en mesure de transmettre ledit au moins un paquet de données ;
  - en réponse à la réception par ledit deuxième dispositif de communications d'utilisateur final (20) dudit premier message de signalisation (DEMANDE), la détermination de paramètres de permission pour ledit au moins un paquet de données devant être transmis par ledit premier dispositif de communications d'utilisateur final (10), lesdits paramètres de permission comportant un niveau de puissance prescrit (PUISSANCE PRESCRITE) pour la transmission dudit au moins un paquet de données ;
  - la diffusion depuis ledit deuxième dispositif de communications d'utilisateur final (20) d'un deuxième message de signalisation (PERMISSION) par l'intermédiaire dudit canal de communications, ledit deuxième message de signalisation (PERMISSION) comportant lesdits paramètres de permission ; et
  - en réponse à la réception par ledit premier dispositif de communications d'utilisateur final (10) dudit deuxième message de signalisation (PERMISSION), la transmission par ledit premier dispositif de communications d'utilisateur final (10) dudit au moins un paquet de données en fonction du niveau de puissance prescrit (PUISSANCE PRESCRITE).
2. Procédé selon la revendication 1, dans lequel lesdits paramètres de permission comportent un niveau de signal d'interférence supérieur (INTERFERENCE MAX) au-dessus duquel au moins un autre dispositif de communications d'utilisateur final qui est connecté audit réseau sans fil est empêché durant ladite transmission dudit au moins un paquet de données de diffuser des informations par l'intermédiaire dudit canal de communications sans fil.
3. Procédé selon la revendication 1, comprenant :
  - le démarrage d'une temporisation au niveau dudit premier dispositif de communications d'utilisateur final (10) après la diffusion dudit premier message de signalisation (DEMANDE) ; et
  - la diffusion d'une demande (DEMANDE) ultérieure de transmission dudit au moins un paquet de données quand ladite temporisation arrive à terme avant que ledit deuxième message de signalisation (PERMISSION) ne soit reçu au niveau dudit premier dispositif de communications d'utilisateur final (10).
4. Procédé selon la revendication 1, comportant :
  - la transmission par ledit deuxième dispositif de communications d'utilisateur final (20) d'un message d'accusé de réception (ACC) quand ledit au moins un paquet de données est reçu au niveau dudit deuxième dispositif de communications d'utilisateur final (20), ledit message d'accusé de réception (ACC) étant destiné audit premier dispositif de communications d'utilisateur final (10).
5. Procédé selon la revendication 1, comportant :
  - le démarrage d'une temporisation au niveau dudit premier dispositif de communications d'utilisateur final (10) après que ledit premier dispositif de communications d'utilisateur final (10) a transmis ledit au moins un paquet de données ; et
  - la retransmission dudit au moins un paquet de données quand ladite temporisation arrive à terme avant qu'un message d'accusé de réception (ACC) qui est indicatif de la réception dudit au moins un paquet de données

au niveau dudit deuxième dispositif de communications d'utilisateur final (20) ne soit reçu depuis ledit deuxième dispositif de communications d'utilisateur final (20).

- 5 6. Procédé selon la revendication 1, dans lequel ledit premier message de signalisation (DEMANDE) comporte en plus dudit niveau de puissance supérieur (PUISSANCE MAXIMUM RESEAU), des données indicatives a) d'adresses (ID ENVOI, ID RECEPTION) desdits premier (10) et deuxième (20) dispositifs de communications d'utilisateur final, b) d'une longueur (LONGUEUR) dudit au moins un paquet de données à transmettre, et c) du niveau de puissance actuel (PUISSANCE ACTUELLE) auquel ledit premier message de signalisation (DEMANDE) est diffusé.  
10
7. Procédé selon la revendication 1, dans lequel ledit deuxième message de signalisation (PERMISSION) comporte en plus desdits paramètres de permission des données indicatives a) d'adresses (ID ENVOI, ID RECEPTION) desdits premier (10) et deuxième (20) dispositifs de communications d'utilisateur final, b) d'une longueur (LONGUEUR) dudit au moins un paquet de données à transmettre, et c) du niveau de puissance actuel (PUISSANCE ACTUELLE) auquel ledit deuxième message de signalisation (PERMISSION) est diffusé.  
15
8. Procédé selon la revendication 2, comportant :  
20 la surveillance au niveau dudit au moins un autre dispositif de communications d'utilisateur final (70) desdits premier (DEMANDE) et deuxième (PERMISSION) messages de signalisation et dudit au moins un paquet de données échangé entre lesdits premier (10) et deuxième (20) dispositifs de communications d'utilisateur final ;  
et  
la construction au niveau dudit au moins un autre dispositif de communications d'utilisateur final (70) d'une liste de contrainte de puissance destinée à être utilisée par ledit au moins un autre dispositif de communications d'utilisateur final dans la transmission future de données sans collision.  
25
9. Procédé selon la revendication 8, dans lequel ladite liste de contrainte de puissance comporte des données indicatives d'un temps particulier auquel il est prévu que ladite transmission dudit au moins un paquet de données s'achève.  
30
10. Procédé selon la revendication 9, dans lequel ledit temps particulier est calculé en fonction de facteurs qui incluent a) la longueur dudit au moins un paquet de données à transmettre, et une quantité de temps requise pour la transmission d'un message de signalisation d'accusé de réception (ACC) depuis ledit deuxième dispositif de communications d'utilisateur final (20) vers ledit premier dispositif de communications d'utilisateur final (10).  
35
11. Procédé selon la revendication 9, dans lequel ladite liste de contrainte de puissance comporte des données indicatives d'un niveau de puissance supérieur qui est dérivé de la transmission de données et d'échanges de messages de signalisation en cours.
- 40 12. Procédé selon la revendication 11, comportant :  
le calcul dudit niveau de puissance supérieur en fonction de facteurs qui comprennent a) ledit niveau de signal d'interférence supérieur (INTERFERENCE MAX) dans ledit deuxième message de signalisation (PERMISSION), et b) la mesure du gain de trajet entre ledit premier dispositif de communications d'utilisateur final (10) et ledit au moins un autre dispositif de communications d'utilisateur final (70).  
45
13. Système pour communiquer des informations sur un réseau sans fil, ledit système comportant :  
50 un premier dispositif de communications d'utilisateur final (10) pour diffuser sur un réseau sans fil une demande (DEMANDE) de transmission d'au moins un paquet de données à un deuxième dispositif d'utilisateur final de communications (20), ladite demande (DEMANDE) comportant des données indicatives d'un niveau de puissance supérieur (PUISSANCE MAXIMALE RESEAU) auquel ledit premier dispositif de communications d'utilisateur final mobile (10) est en mesure de transmettre ledit au moins un paquet de données ;  
un processeur (501) dudit deuxième dispositif de communications d'utilisateur final (20) adapté pour recevoir ladite demande (DEMANDE) et déterminer des paramètres de permission pour ledit au moins un paquet de données devant être transmis par ledit premier dispositif de communications d'utilisateur final mobile (10), lesdits paramètres de permission comportant un niveau de puissance prescrit (PUISSANCE PRESCRITE) pour la transmission dudit au moins un paquet de données ;  
55

## EP 0 773 636 B1

un premier émetteur (506) inclus dans ledit deuxième dispositif de communications d'utilisateur final (20) pour envoyer un message de signalisation (PERMISSION) audit premier dispositif de communications d'utilisateur final mobile (10), ledit deuxième message de signalisation (PERMISSION) comportant lesdits paramètres de permission ; et

5 un deuxième émetteur (506) inclus dans ledit premier dispositif de communications d'utilisateur final (10), sensible à la réception dudit message de signalisation (PERMISSION), pour envoyer ledit au moins un paquet de données audit deuxième dispositif de communications d'utilisateur final (20) en fonction dudit niveau de puissance prescrit (PUISSANCE PRESCRITE).

10

15

20

25

30

35


40

45


50

55

*FIG. 1*

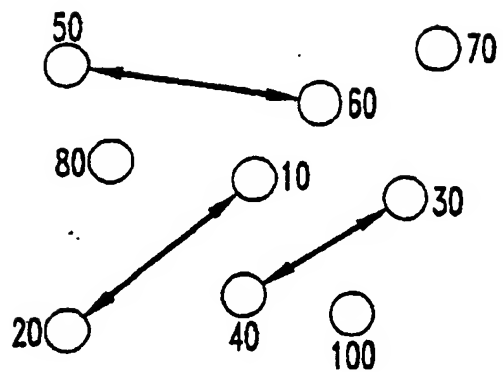

*FIG. 2*

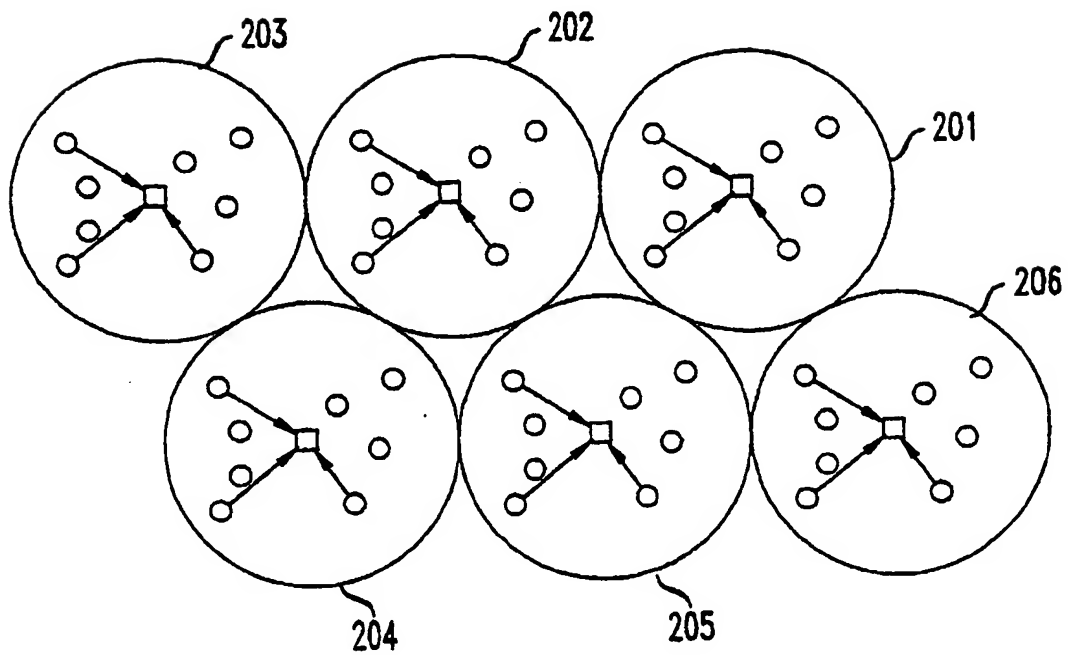

*FIG. 3*

REQUEST SUB-FIELDS

10 SEND\_ID  
 10 RECEIVE\_ID  
 6 LENGTH  
 6 CURRENT\_POWER  
 6 NET\_MAXIMUM\_POWER  
 38 TOTAL

PERMIT SUB-FIELDS

10 SEND\_ID  
 10 RECEIVE\_ID  
 6 LENGTH  
 6 CURRENT\_POWER  
 6 PRESCRIBED\_POWER  
 6 MAX\_INTERFERENCE  
 44 TOTAL

*FIG. 5*

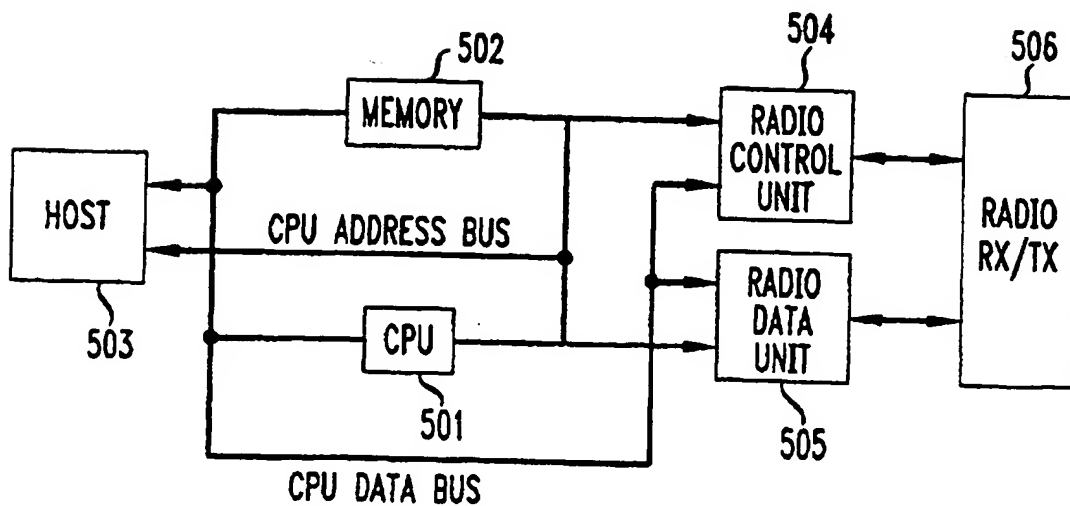




FIG. 4

SENDER	RECEIVER	3rd PARTY
ISSUE REQUEST=(SEND_ID RECEIVE_ID LENGTH CURRENT_POWER NET_MAXIMUM_POWER)	MEASURE RECEIVE LEVEL (2)	
	CALCULATE SENDER RECEIVER PATH GAIN MEASURE AMBIENT INTERFERENCE LEVEL DECIDE IF PACKET CAN SUCCEED WITHIN NET_MAXIMUM_POWER IF NOT STOP DECIDE POWER AND CALCULATE MAXIMUM ALLOWED INTERFERENCE	
	ISSUE PERMIT (SEND_ID RECEIVE_ID LENGTH CURRENT_POWER PRESCRIBED_POWER MAX_INTERFERENCE)	MEASURE RECEIVE LEVEL CALCULATE RECEIVER-3rd PARTY PATH GAIN (5) CALCULATE MAXIMUM_POWER TO AVOID MAX_INTERFERENCE AT RECEIVER ADD MAXIMUM_POWER AND EXPIRATION TIME TO POWER CONSTRAINT LIST AND UPDATE ITS OWN NET_MAXIMUM_POWER
SEND PACKET AT PRESCRIBED POWER (END OF PACKET)	ISSUE ACK	
(SUCCESS)	(END OF ACK)	POWER CONSTRAINT EXPIRES SO REMOVE IT FROM LIST AND UPDATE NET_MAXIMUM_POWER